


13 series is designed in strict accordance with the requirements of the mobile machinery industry. Its compact shape can be fully integrated with the hydraulic cylinder with limited head space. The high versatile IP68 profile housing offers full protection for use in harsh environments with high contamination and presence of dust. If the hydraulic cylinder is used with a special connector, the protection level is up to IP69K. Vibration and shock rating are also high-level 25g / 10-2000Hz and 100g (single shock).

It adopts the non-contact magnet-rostrictive measuring technology for precise, accurate, and absolute measurement. The non-contact feature provides exceptional ease of installation and guarantees almost unlimited mechanical life expectancy.



## Specifications

Order Code	13 S
Output	Voltage / Current
Measurement Type	Linear displacement
Resolution	<500mm ±0.10mm, 700mm ±0.18mm, 1000mm ±0.24mm 1250mm ±0.30mm, 1750mm ±0.42mm,
Repeatability	< ±0.005% of full scale
Non-Linearity	< ±0.04% of full scale (minimum ±100µm for 60mm damping zone) < ±0.08% of full scale (for 36.5mm damping zone)
Input Voltage	+12V / +24Vdc
Input Protection	Polarity protection up to -30Vdc, Over voltage protection up to 36Vdc
Power Consumption	1W
Dielectric Strength	500Vdc (DC ground to machine ground)
Operation Temp.	-40 to 85°C, Humidity 90% non-condensing
Sealing	IP 68 (IP 69K when installed inside a cylinder with M12x1 connection type)
Vibration Rating	25g / 10-2000Hz / IEC standard 68-2-6
Shock Rating	100g single hit per IEC standard 68-2-27
EMC	Emission EN 61000-6-3, Immunity EN 61000-6-2, EN 61000-4-2/3/4/6
Pressure Rating	300 bar / 400 bar peak
Material	Stainless Steel



## Order Code

1 3 S X X X X X X X X X X X X X

### Output

011 = 0.25 - 4.75V      101 = 4 - 20mA  
 012 = 0.5 - 4.5V      104 = 20 - 4mA  
 013 = 4.75 - 0.25V  
 014 = 4.5 - 0.5V

### Connection Type

N\_\_A = 4 single wires (20AWG)  
 N\_\_E = 4 single wires , M12x1 IP69K,4pin (pin assignment 2-3-4)  
 N\_\_G = 4 single wires , M12x1 IP69K,4pin (pin assignment 1-3-4)  
 N\_\_H = 4 single wires , M12x1 IP69K,4pin (pin assignment 1-2-3)  
 Ex. : 06 = 60mm wire length  
       25 = 250mm wire length  
 T\_\_A = integral PUR shielded cable, pigtail for wire termination  
 Ex. : 10 = 1.0 meter cable length (0.5 meter mini.)  
       35 = 3.5 meter cable length

### Sensor Styles

1 = 7 mm dia. rod, damping zone 60mm  
 2 = 7 mm dia. rod, damping zone 36.5mm


### Magnet Type

1 = Outer dia. 33mm, inner dia. 13.5 ring magnet  
 2 = Outer dia. 25.4mm, inner dia. 13.5 ring magnet  
 3 = Outer dia. 17.4mm, inner dia. 13.5 ring magnet

### Stroke Length (mm)

0075, 0100, 0125, 0150, 0175, 0200, 0225  
 0250, 0275, 0300, 0325, 0350, 0375, 0400  
 0425, 0450 (25mm increment after)

## Pin Assignments



	Color	N__E
1	Yellow	N.C.
2	Brown	12/24 Vdc
3	White	0 Vdc
4	Green	Output

	Color	N__G
1	Brown	12/24 Vdc
2	Yellow	N.C.
3	White	0 Vdc
4	Green	Output




	Color	N__H
1	Brown	12/24 Vdc
2	Green	Output
3	White	0 Vdc
4	Yellow	N.C.

## Cable Assignments

	Color	N__A
	Brown	12/24 Vdc
	Green	Output
	Yellow	N.C.
	White	0 Vdc


	Color	T__A
	Red	12/24 Vdc
	Green	Output
	Yellow	N.C.
	Black	0 Vdc

## Installation Dimensions

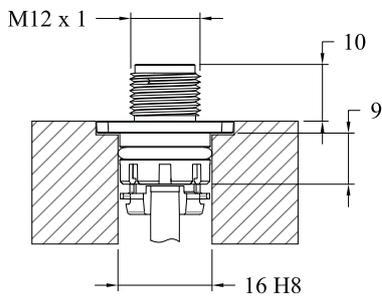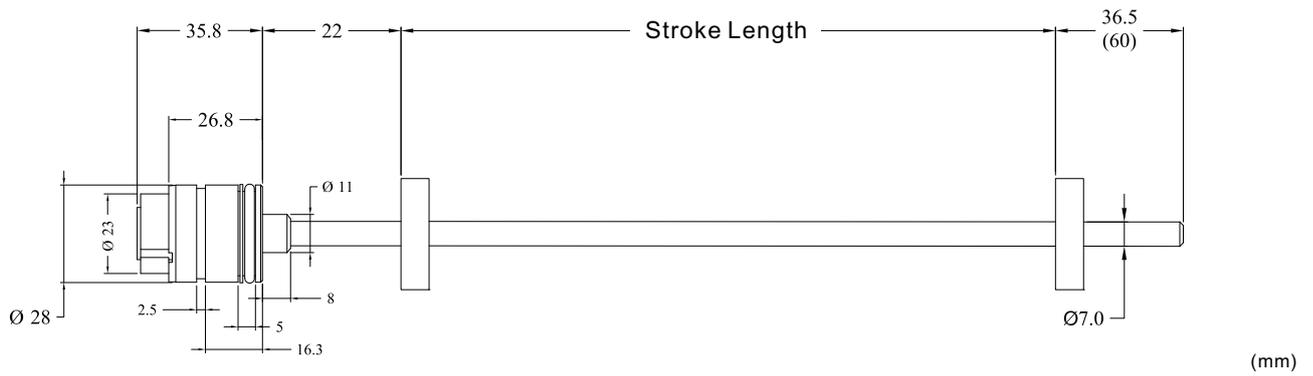

IP69K M12x1

## Installation

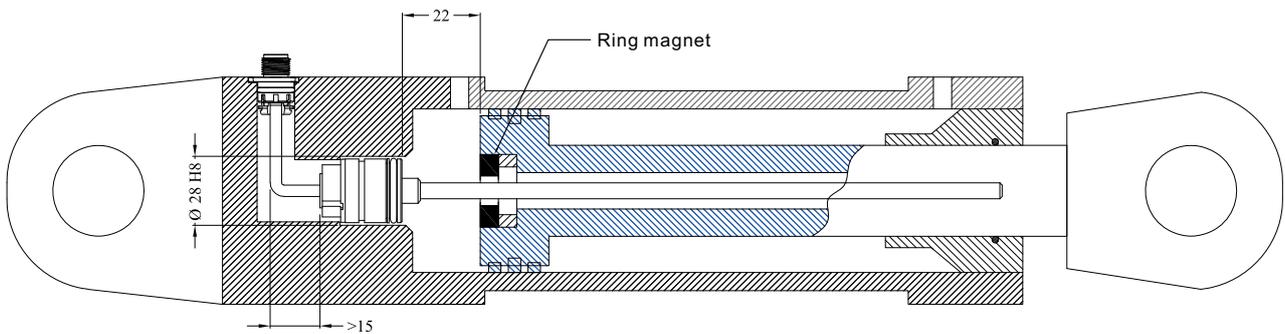


## Remark

- 1) Use a non-ferrous circlip to fasten the magnet.
- 2) Minimum drilling for a 10mm rod should be 13.5mm.
- 3) No less than 3mm clearance between the end of the sensor rod and the bottom of the rod bore at full retraction.

Discription  
Order Code


Outer Dia. 17.4 mm ring  
1700 951 025

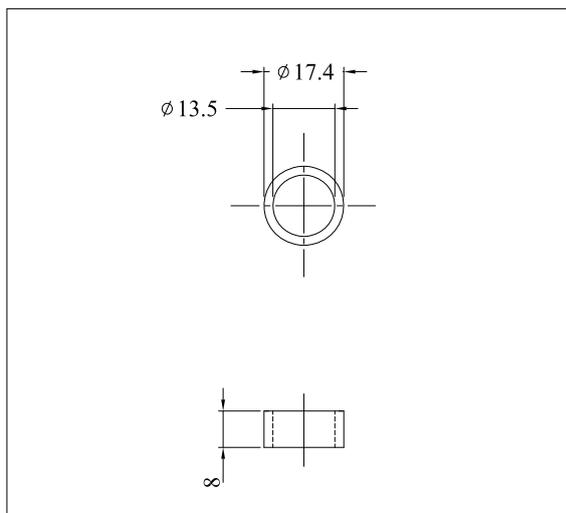

Material  
Weight

Plastic  
~4g


Outer Dia. 25.4mm ring  
1700 951 023

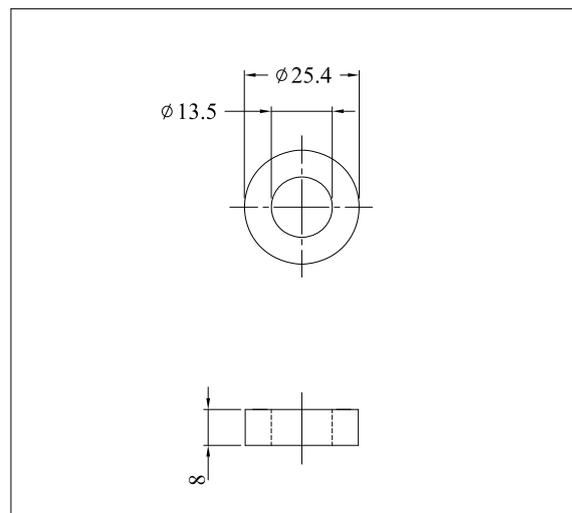

Plastic  
~8g

Discription  
Order Code

Outer Dia. 33mm ring  
1700 951 001

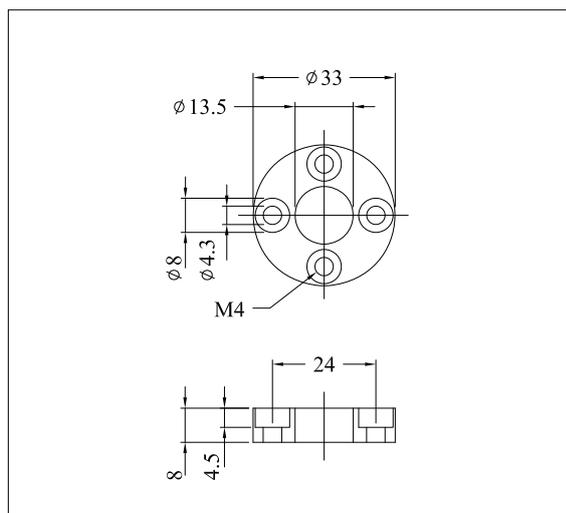

Material  
Weight

Plastic  
~8g

Discription  
Order Code  
Material

Dia. 33mm Spacer  
1700 951 002  
Plastic

