

ELECTRICAL OPTIONS/ SPECIFICATIONS







OUTPUT SUPPLY
 CODE 'A' 0.5 TO 4.5V RATIO METRIC 5V
 SUPPLY CURRENT 12mA TYP. 20mA MAX.

CABLE: 3 CORE 0.2mm², O/A SCREEN, Ø4mm PUR JACKET
 - SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm.
 e.g. 'L50'

CONNECTIONS:
 3 CORE PINS
 RED '1' +Ve
 BLACK '2' 0V
 WHITE '3' OUTPUT
 SCREEN BODY

RANGE OF DISPLACEMENT FROM 0-30° TO 0-140° e.g. 76°,
 IN INCREMENTS OF 1°.

BODY MATERIAL:- ALUMINIUM ALLOY.

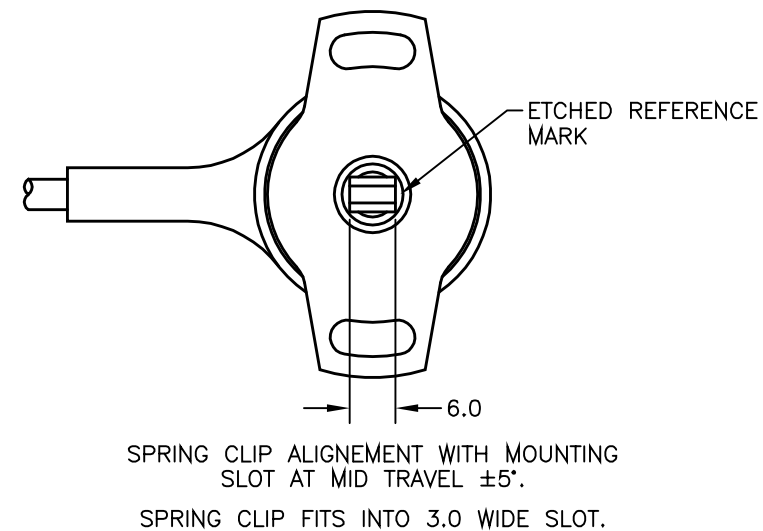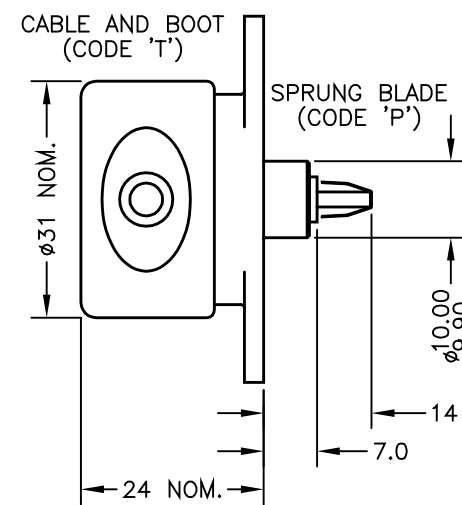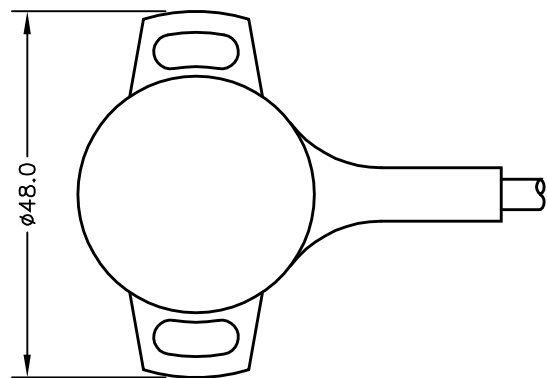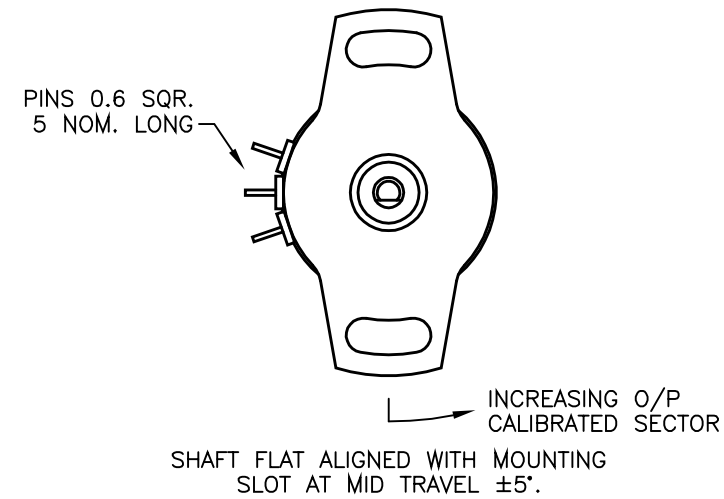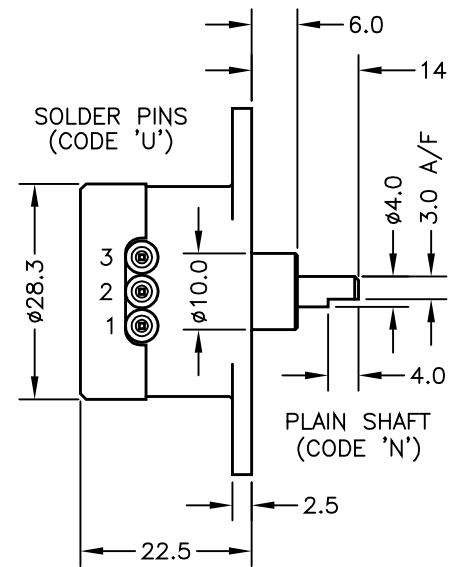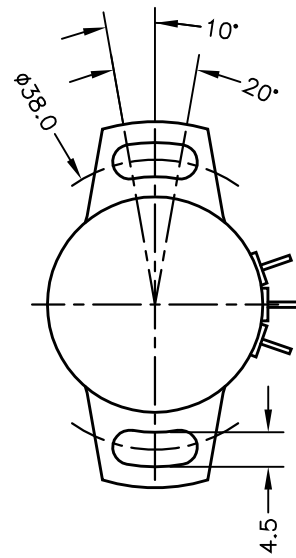



H	REDRAWN	PDM
I	BOSS Ø10.00 ADDED	PDM
J	ADDITIONAL DIMS/VIEWS ADDED.	PDM
K	RANGE NOTE AMENDED ~ RAN1200	PDM



DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
 CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED
 BY THE AUTHORISED PERSON
 THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.



H	19/10/06		CHECKED BY	X	±0.4
I	15/01/09		RDS	X.X	±0.2
J	06/07/11			X.XX	±0.1
K	11/09/17				DIMS mm
		DESCRIPTION			
		P501 RIPS MINIATURE ROTARY SENSOR			
SCALE		DRAWING NUMBER			
10mm		P501-11			
		REV		K	
		SHEET		1 OF 1	



P501 MINIATURE ROTARY SENSOR

High-resolution angle feedback for industrial and scientific applications

- **Non-contacting inductive technology to eliminate wear**
- **Angle set to customer's requirement**
- **Compact, durable and reliable**
- **High accuracy and stability**
- **Sealing to IP67**



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications.

Our P501 is an affordable, durable, high-accuracy rotary sensor designed for industrial and scientific feedback applications, but requires a smaller footprint than the P500.

Like all Positek® sensors, the P501 provides a linear output proportional with input shaft rotation. Each unit is supplied with the output calibrated to the angle required by the customer, between 30 and 140 degrees and with full EMC protection built in. Overall performance, repeatability and stability are outstanding over a wide temperature range. It is particularly suitable for OEMs seeking good sensor performance for applications where space is important.

The sensor has a rugged nickel plated aluminium body and integrated mounting flange. The flange has two 4.3mm by 20 degree wide slots on a 48mm pitch to simplify mounting and position adjustment.

Environmental sealing is to IP67 on the cable version.

SPECIFICATION

Dimensions

Body diameter	28.3 mm (solder pins) 30.8 mm (with cable boot)
Body Length (to seal face)	23.2 mm
Shaft	8.5 mm Ø 4 mm

For full mechanical details see drawing P501-11

Independent Linearity ≤ ± 0.31% FSO @ 20°C - up to 80°

Temperature Coefficients < ± 0.01%/°C Gain &
< ± 0.01%FS/°C Offset

Frequency response > 10 kHz (-3dB)

Resolution Infinite

Noise < 0.02% FSO

Torque < 20 mNm Static

Environmental Temperature Limits

Operating -40°C to +125°C

Storage -40°C to +125°C

Sealing IP67

EMC Performance EN 61000-6-2, EN 61000-6-3

Vibration IEC 68-2-6: 10 g

Shock IEC 68-2-29: 40 g

MTBF 350,000 hrs 40°C Gf

Drawing List

P501-11 Sensor Outline

3D models, step or .igs format, available on request.

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

P501-17x

1 of 2



P501 MINIATURE ROTARY SENSOR



High-resolution angle feedback for industrial and scientific applications

How Positek's technology eliminates wear for longer life

Positek's Inductive technology is a major advance in displacement sensor design. Our displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT. Our technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A Positek sensor, based on simple inductive coils using Positek's ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life. It also overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials, no requirement for separate signal conditioning. We also offer a range of ATEX-qualified intrinsically-safe sensors.

P501	a	b	c	d	e	f
	Displacement	A	Connections	Option	Option	Z-code

a Displacement	Value
Factory set to any angle from 0-30° (±15°) to 0-140° (±70°) (e.g. 0-54°)	54
b Output	Code
Supply V_{dc} (tolerance)	Code
+5V (4.5 - 5.5V)	A
Output	
0.5 - 4.5V (ratiometric with supply)	
Supply Current: 'A' 10mA nominal, 12mA max.	
c Connections	Code
Solder Pins requires option 'U'	L0
Cable requires option 'T'	Lxx
Specify required cable length 'xx' in cm. e.g. L2000 specifies cable gland with 20 m of cable, 50 cm supplied as standard.	
d Shaft Option	Code
Plain Shaft	N
Sprung Blade	P
e Housing Options	Code
Heatshink Boot, IP67 requires option 'Lxx'	T
None requires option 'L0'	U
f Z-code (optional)	Code
≤± 0.1% FSO @20°C Independent Linearity 0 - 100° max.	Z650



For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615


Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.



Installation Information


P501 MINIATURE ROTARY SENSOR

Output Option	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance: (include leads for 4 to 20mA O/Ps)
A	0.5 - 4.5V (ratiometric with supply)	+5V (4.5 - 5.5V)	$\geq 5k\Omega$

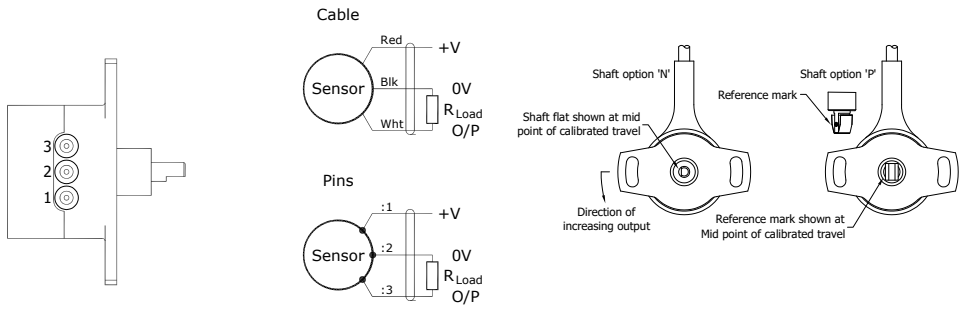

Mechanical Mounting: Flange mounted. The sensor should be mounted with minimal axial and radial loading on the shaft for optimum life. It is recommended that the \varnothing 4 mm shaft option is coupled to the drive using a flexible coupling - see drawing P501-11.

Output Characteristic: The sensor has full rotational freedom and two sectors, 180° apart, over which linear response can be achieved. At the mid point of the calibrated range the output signal will be half full scale deflection, shaft alignment as sketch above. In the calibrated range the output increases as the shaft is rotated in an anti-clockwise direction viewed from the shaft. The calibrated output is factory set to be between 30° and 140° .

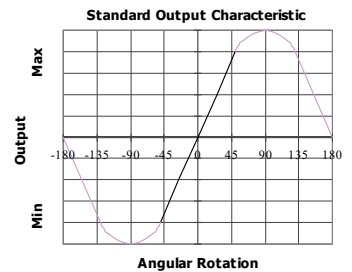

Incorrect Connection Protection levels: Not protected – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.

For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.