

OUTPUT OPTION	OUTPUT	SUPPLY
A	0.5 TO 4.5V RATIO METRIC	5V
C	0.5 TO 9.5V	24V
G	0.5 TO 4.5V	24V
H	4 TO 20mA	24V

} BUFFERED





SUPPLY CURRENT 12mA TYP. 20mA MAX. PLUS O/P CURRENT
 CABLE: 0.2mm², O/A SCREEN, PUR JACKET - SUPPLIED
 WITH 50cm OR REQUIRED LENGTH IN cm. e.g. 'L50'
 3-CORE: JACKET ϕ 4mm

CABLE/CONNECTOR* CONNECTIONS;
 3 CORE CONNECTOR

RED	:1	+Ve
BLACK	:3	0V
WHITE	:2	OUTPUT
SCREEN	:4	BODY

*CONNECTORS; MAXIMUM CONDUCTOR CROSS SECTION 0.25mm²
 RANGE OF DISPLACEMENT FROM 0-15° TO 0-160° e.g. 76°,
 IN INCREMENTS OF 1°.

BODY MATERIAL: STAINLESS STEEL.
 FLANGE BASE MATERIAL:- STAINLESS STEEL.
 SERVO MOUNT MATERIAL:- STAINLESS STEEL.

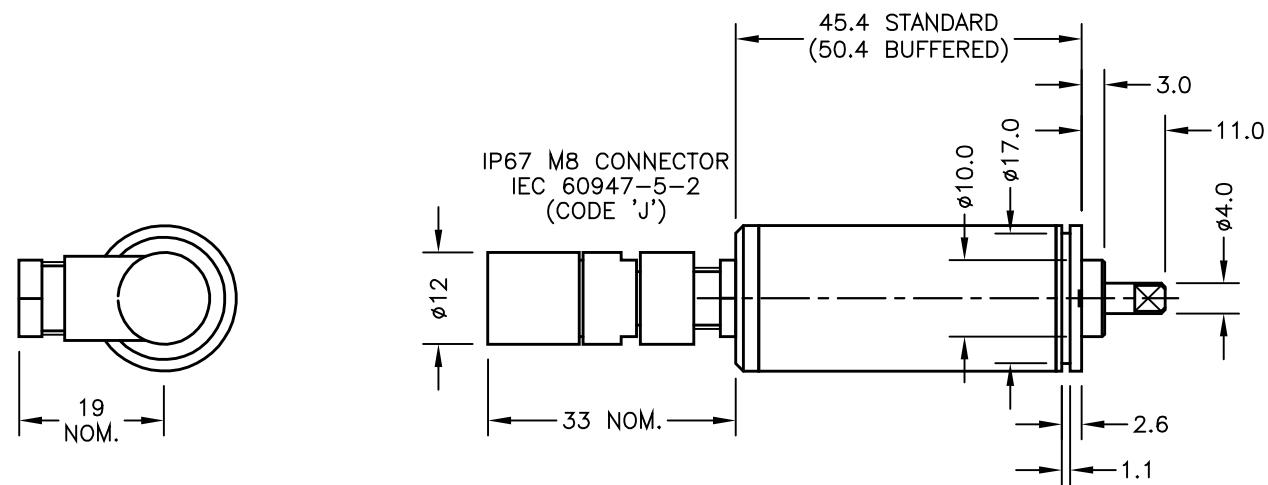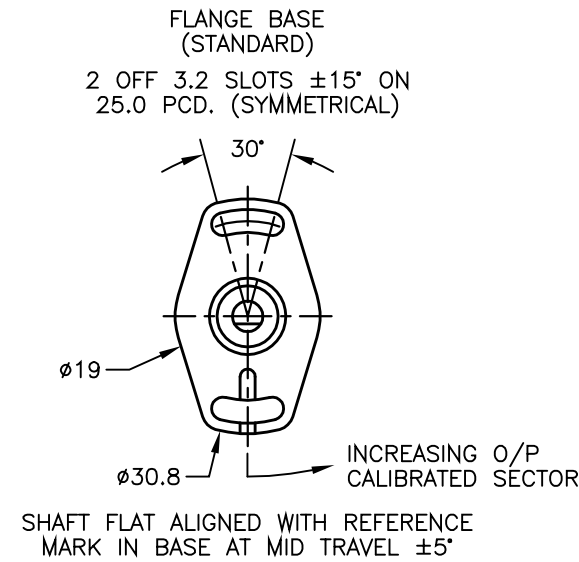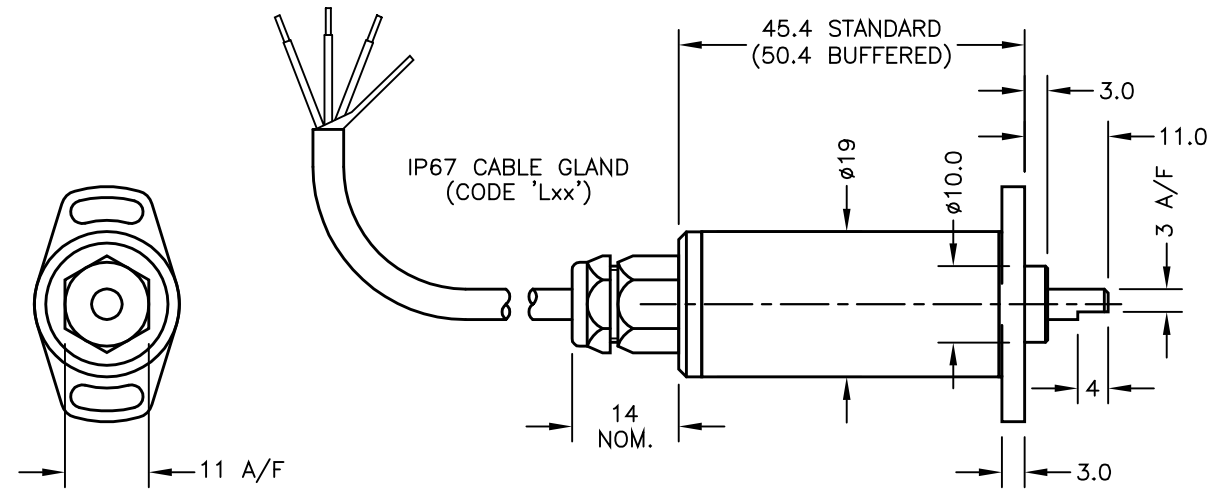

D	SHAFT LENGTH REDUCED 0.5 - RAN538.	PDM
E	SERVO MOUNT SHOWN AT MID POSITION	RDS
F	OPTION 'J' ADDED - RAN1068.	PDM
G	RANGE NOTE AMENDED ~ RAN1200	PDM
H	4 TO 20mA ADDED RAN1256	RDS
J	STAINLESS FLANGE BASE & SERVO MOUNT WAS ALUMINIUM - RAN1218	PDM



DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
 CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED
 BY THE AUTHORISED PERSON
 THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

POSITEK

LIMITED

D	21/01/15		CHECKED BY	X	±0.4
E	7/4/15		RDM	X.X	±0.2
F	02/12/15			X.XX	±0.1
					DIMS mm
G	12/09/17	DESCRIPTION			
H	12/09/18	P505 RIPS MINIATURE			
J	12/09/18	ROTARY SENSOR			
SCALE		DRAWING NUMBER		P505-11	REV J
5mm		NUMBER			SHEET 1 OF 1



P505 SLIM-LINE ROTARY SENSOR

High-resolution angle feedback for industrial and scientific applications

- **Non-contacting inductive technology to eliminate wear**
- **Angle set to customer's requirement**
- **Compact, durable and reliable**
- **High accuracy and stability**
- **Sealing to IP67**



As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications.

Our P505 is an affordable, durable, high-accuracy rotary sensor designed for industrial and scientific feedback applications, but requires a smaller footprint than the P500.

Like all Positek® sensors, the P505 provides a linear output proportional with input shaft rotation, which has full 360 degree rotational freedom. Each unit is supplied with the output calibrated to the angle required by the customer, between 15 and 160 degrees and with full EMC protection built in.

It is particularly suitable for OEMs seeking good sensor performance for applications where space is important.

Overall performance, repeatability and stability are outstanding over a wide temperature range. The P505 has long service life and environmental resistance with stainless steel body, shaft, flange and servo mounts. The flange or servo mounting options make the sensor easy to install. The P505 also offers a range of mechanical and electrical options.

Environmental sealing is to IP67.

SPECIFICATION

Dimensions

Body diameter	19 mm
Body Length (to mounting face)	45.4 mm standard, 50.4 mm buffered
Shaft	8 mm Ø 4 mm

For full mechanical details see drawing P505-11

Independent Linearity

$\leq \pm 0.25\%$ FSO @ 20°C - up to 100°

Temperature Coefficients

$< \pm 0.01\%$ /°C Gain &
 $< \pm 0.01\%$ FS/°C Offset
 > 10 kHz (-3dB)

Frequency response

Infinite

Resolution

Noise

$< 0.02\%$ FSO

Torque

< 15 mNm Static

Environmental Temperature Limits

Operating	-40°C to +125°C standard
	-20°C to +85°C buffered
	-40°C to +125°C

Storage

Sealing

IP67

EMC Performance

EN 61000-6-2, EN 61000-6-3

Vibration

IEC 68-2-6: 10 g

Shock

IEC 68-2-29: 40 g

MTBF

350,000 hrs 40°C Gf

Drawing List

P505-11

Sensor Outline

3D models, step or .igs format, available on request.

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

P505-17m

1 of 2



P505 SLIM-LINE ROTARY SENSOR



High-resolution angle feedback for industrial and scientific applications

How Positek's technology eliminates wear for longer life

Positek's Inductive technology is a major advance in displacement sensor design. Our displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT. Our technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A Positek sensor, based on simple inductive coils using Positek's ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life. It also overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials, no requirement for separate signal conditioning. We also offer a range of ATEX-qualified intrinsically-safe sensors.

P505	a	b	c	d	e
	Displacement	Output	Connections	Option	Z-code

a Displacement	Value
Factory set to any angle from 0-16° (±8°) to 0-160° (±80°) (e.g. 0-54°)	54
b Output	Code
Supply V _{dc} (tolerance)	Output
+5V (4.5 - 5.5V)	0.5 - 4.5V (ratiometric with supply)
+24V nom. (13 - 28V)	0.5 - 9.5V
+24V nom. (9 - 28V)	0.5 - 4.5V
+24V nom. (13 - 28V)	4 - 20mA 3 wire Source
Supply Current 'A', 'C', 'G' 10mA typical, 12mA max. 'H' 30mA typical, 35mA max.	
c Connections	Code
Connector axial IP67 4 pin M8 IEC 61076-2-104, nylon	J
Connector axial IP67 4 pin M8 IEC 61076-2-104, nylon, pre-wired	Jxx
Cable gland axial IP67 M8, metal, 3-core cable	Lxx
Specify required cable length 'xx' in cm. e.g. L2000 specifies axial cable gland with 20 m of cable, 50 cm supplied as standard.	
d Sensor Mounting	Code
Flange default	blank
Servo Mount	P
See drawing P505-11 for details.	
e Z-code (optional)	Code



For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615


Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.

Installation Information

P505 SLIM-LINE ROTARY SENSOR


Output Option	Output Description:	Supply Voltage: V_s (tolerance)	Load resistance: (include leads for 4 to 20mA O/Ps)
A	0.5 - 4.5V (ratiometric with supply)	+5V (4.5 - 5.5V)	$\geq 5k\Omega$
C	0.5 - 9.5V	+24V nom. (13 - 28V)	$\geq 5k\Omega$
G	0.5 - 4.5V	+24V nom. (9 - 28V)	$\geq 5k\Omega$
H	4 - 20mA	+24V nom. (13 - 28V)	300 Ω max.

Not all output options available - see product datasheet for full options list

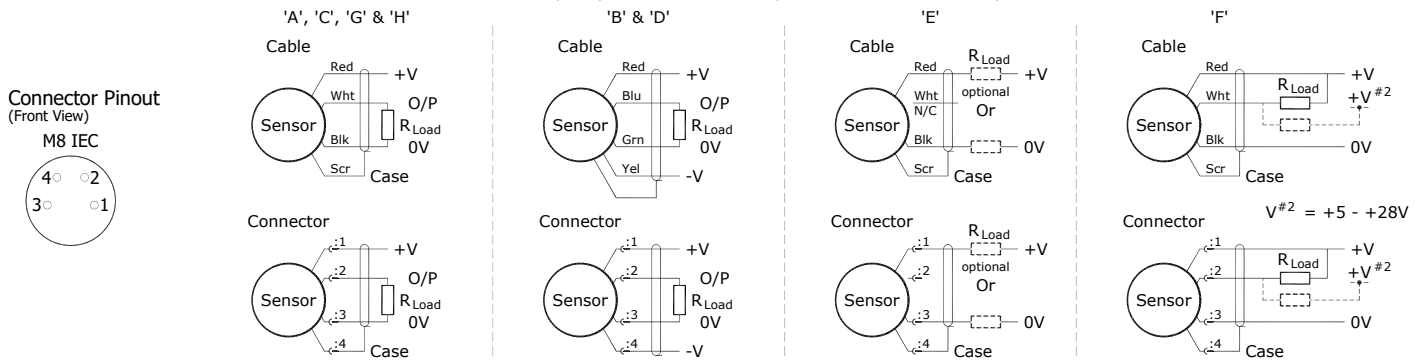

Mechanical Mounting: Flange mounted - see drawing P505-11. The sensor should be mounted with minimal axial and radial loading on the shaft for optimum life. It is recommended that the shaft is coupled to the drive using a flexible coupling, recommended maximum axial load 1kg. Tests indicate that life in excess of 16 million cycles can be achieved with 1kg side and end load.

Output Characteristic: The sensor has full rotational freedom and two sectors, 180° apart, over which linear response can be achieved. At the mid point of the calibrated range the output signal will be half full scale deflection, and the flat on the shaft is aligned with the registration mark in the base of the sensor. In the calibrated range the output increases as the shaft is rotated in an anti-clockwise direction viewed from the shaft. The calibrated output is factory set to be between 15 and 160°.

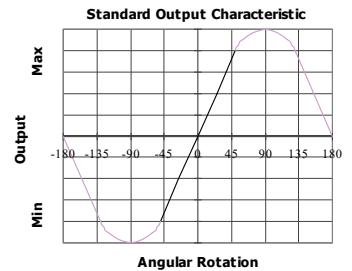

Incorrect Connection Protection levels:-

- A **Not protected** – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.
- C & G Supply leads diode protected. Output must not be taken outside 0 to 12V.
- H Supply and output lead diode protected. Do take output negative of 0 volts.

For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.