


- ▶ 2,4 & 6 way variants
- ▶ Ergonomic design for comfort
- ▶ Choice of curly or straight tubing
- ▶ Soft touch buttons
- ▶ Various colours & layout options
- ▶ Suitable for use with 6891 airswitches
- ▶ Inherently waterproof

Specifications	
Connection method	1.5mm I/D tube for use with airswitches with 2mm spouts
Operating temperature range	-5° C to +40° C with temperature compensated airswitches
Body material	Thermoplastic
Weight	0.2 Kg
Additional information	Various button colours and designs available, hook optional

Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

**Dimensions**

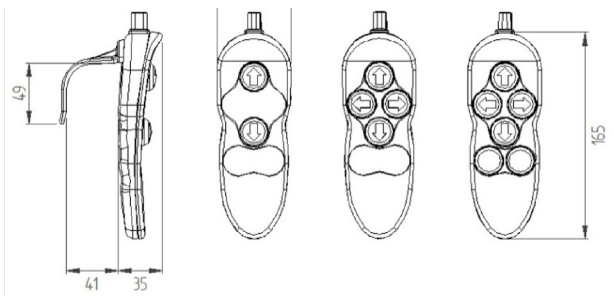




## Ordering information

(Please use the characters in the chart below to create your product code)

**Sample Code**      6451   -   A   B   C   A   -   A   B   ZZ

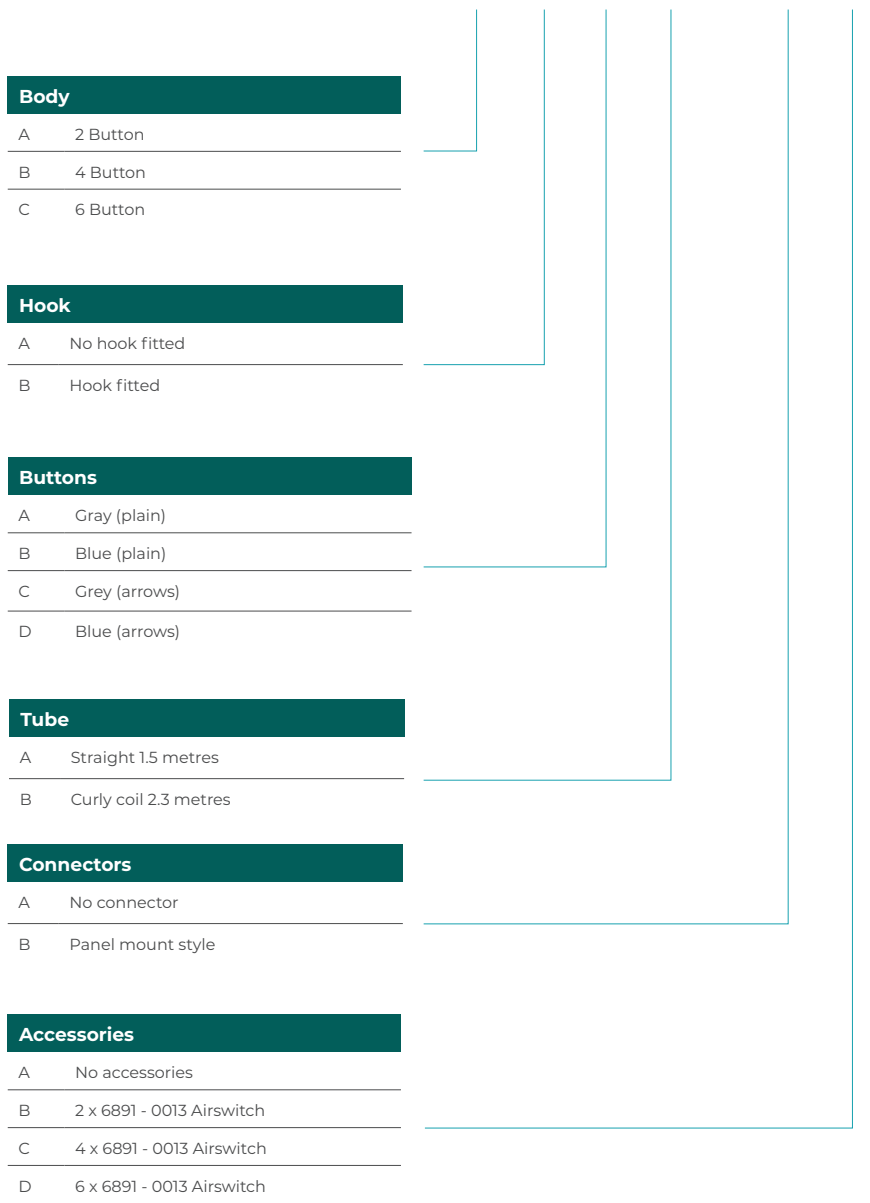

If you require a customized solution for your program contact our sales team.