

ULS10

Ultrasonic Distance/Level Sensor

Profiles



ULS10 Ultrasonic Level Sensor is dedicated to measuring level and distance in industrial conditions.

All gold-plated circuit boards, internal electromagnetic shielding and software digital filter are tested for (industrial) 48 hour under high and low temperature aging. It promises higher and long-term reliability. Shell is made of solid texture and good NLEPF acoustic characteristics of synthetic material. The body is shape sophisticated aesthetics, waterproof, dustproof, and can adapt to the most of working conditions on site. A very quick and easy installation, maintenance can be realized.

Installation

		<ol style="list-style-type: none"> 1. Measure reference surface is the bottom line of sensor 2. Highest solid level cannot enter into the blind area 3. Level measurement should avoid the feeling hole, aim the smoother level surface 4. Better use sun/rain shade when mounting in out field 5. When mounting, sensor should be kept distance to the wall surface because of beam angle of ultrasonic wave. 6. When measuring the object level, the feeding hole should be avoided to prevent the ultrasound echo being interfered.
--	--	--

Features


- 1.Support M49*1.5 mm threaded into type installation and coil clamping type installation,the installation more convenient
- 2.Less than 9° Beam angle design ,Resolution 3mm, less than 200ms responsible time to make sure more accuracy
- 3.Wide range of application,Sealed high-temperature toxic volatile,flammable and explosive of strongly corrosive liquid medium level measurement of non-contact ultrasonic sensors.
- 4.Housing adopts the NLEPE synthetic material IP66/ IP68 waterproof,Anti-Skid,Anti-corrosion,Anti-explosion structure
- 5.High quality terminal blocks ,Excellent anti-jamming is strong, long term stability and durability

Specification

Parameter	ULS10	
Level Range	10,15m optional	
Blind area	≤ 300 ~ 1200 mm (according to different range and sensor)	
Beam angle	< 12°	
Accuracy	0.5%FS (at blind-fold drive away, 25 °C)	
Output	Analog signal 4~20mA; Load>300Ω;	Digital signal RS485
Power supply	DC24V/300mA	
Consumption	< 1.5W	
Min. resolution	1mm	
Frequency	20 KHz~43.0KHz	
Protection class	IP66 or IP68	
Explosion proof	Exiall BT4Gb	
Operation temp.	-20°C ~60°C	
Housing	ABS/ Nylon	
Cable	1 m	
Dimension	Φ92mm x 198mm x M60	
Installation	M60 x 2 or Φ61mm hole with gasket	


Wiring connection

1. Wiring diagram of current output connecting with secondary instrument

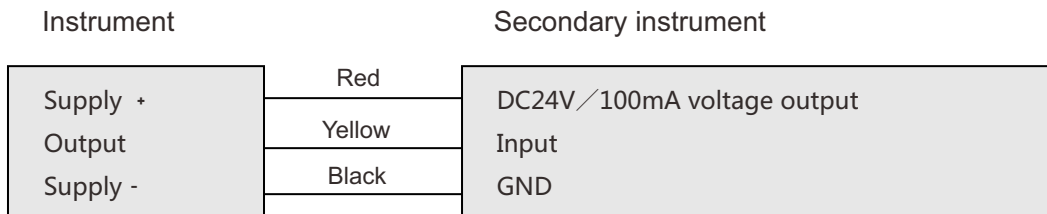

2. Wiring diagram of RS-485 connecting with PC

External power/ instrument/ 485/ PC

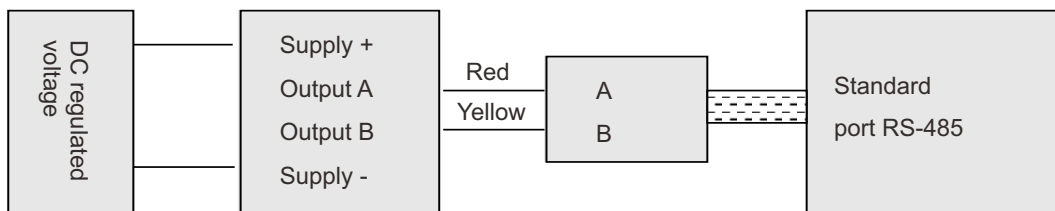

ULS10


Ultrasonic Distance/Level Sensor

Ordering code

Part Number Selection Table

ULS10 Selection Type		XX	X	U2	RX	XX	001
Range	10 Meter 15 Meters	10 15					
Water Proof	IP66 IP68		A D				
Power Supply	DC24V/max 300mA			U2			
Output	4-20 mA + RS-485				RX		
Temperature	0...50 °C -20...70 °C					T0 T2	
Cable Length	1 Meter						001

Application

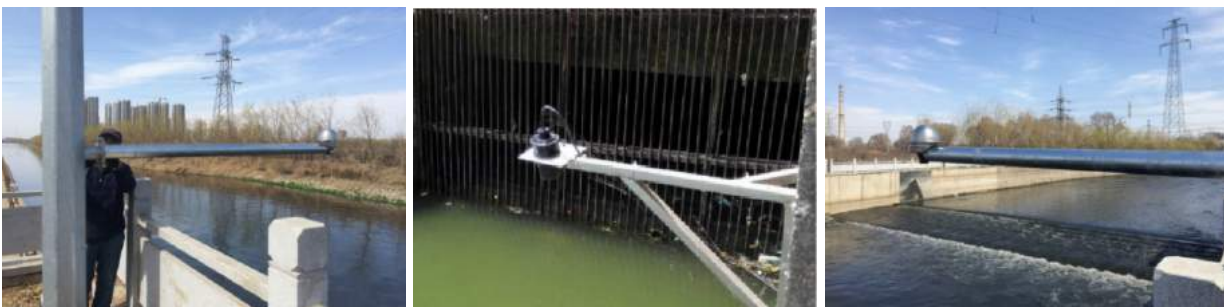

See also:

ULT21 - Ultrasonic Level Transducer

