


MID TRAVEL, $\pm 5^\circ$, WITH REFERENCE MARK IN BASE IN VERTICAL POSITION

INCREASING O/P CALIBRATED SECTOR

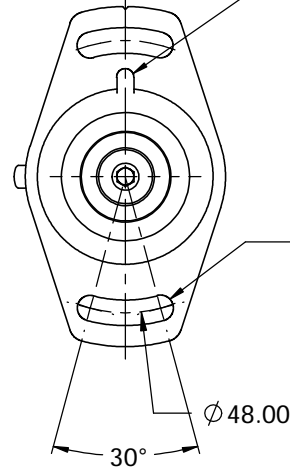

2 OFF 4.4 SLOTS $\pm 15^\circ$ ON PCD. (SYMMETRICAL)

| ELECTRICAL OPTIONS/ SPECIFICATIONS | | |
|------------------------------------|----------------|----------|
| OUTPUT | SUPPLY (NOM.) | |
| 'A' 0.5 - 4.5V RATIOMETRIC | 5V | STANDARD |
| 'B' $\pm 5V$ | $\pm 15V$ | |
| 'C' 0.5 - 9.5V | 24V | BUFFERED |
| 'D' $\pm 10V$ | $\pm 15V$ | |
| 'G' 0.5 - 4.5V | 24V | |
| SUPPLY CURRENT 12mA TYP. 20mA MAX. | | |
| 'E' 4 TO 20mA 2-WIRE | 24V (18V MIN.) | |
| 'F' 4 TO 20mA SINK† | 24V | |
| 'H' 4 TO 20mA SOURCE‡ | 24V | |
| † OUTPUT COMPLIANCE 5-28V | | |
| ‡ DRIVE 300Ω MAXIMUM TO 0V | | |


| CONNECTIONS: | CABLE 3-CORE | CABLE 4-CORE |
|--------------|--------------|--------------|
| +Ve | RED | RED |
| 0V | BLACK | GREEN |
| -Ve | - | YELLOW |
| OUTPUT | WHITE | BLUE |
| BODY | SCREEN | SCREEN |

CABLE: 0.2mm², O/A SCREEN, PUR JACKET. O/D; 3-CORE: $\varnothing 4mm$, 4-CORE: $\varnothing 4.6mm$, SUPPLIED WITH 50cm OR REQUIRED LENGTH IN cm. e.g. 'L50' CONNECTORS: MAXIMUM CONDUCTOR CROSS SECTION 0.25mm²

RANGE OF DISPLACEMENT FROM 0-15° TO 0-160° e.g. 76°, IN INCREMENTS OF 1° BODY MATERIAL:- STAINLESS STEEL.

DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED BY THE AUTHORISED PERSON.
THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.

| REV | CHANGE HISTORY | DR'WN | DATE | CHK'D |
|-----|----------------|-------|------------|-------|
| A | FIRST RELEASE | ASC | 29/05/2020 | - |
| | | | | |
| | | | | |
| | | | | |




| | | | |
|---|----------------------------------|--|---|
| APPROVED BY RDM | REV A | | X ± 0.4 X.X ± 0.2 X.XX ± 0.1 DIMS mm |
| DESCRIPTION 10bar SUBMERSIBLE TILT SENSOR | | | |
| SCALE 3:4 | DRAWING NUMBER S613-11 | | |
| A4 | SHEET 1 OF 1 | | |



S613 SUBMERSIBLE LARGE ANGLE TILT SENSOR

High-resolution tilt feedback for submerged and outdoor / offshore applications

- **Non-contacting inductive technology to eliminate wear**
- **Angle set to customer's requirement**
- **Compact and self-contained**
- **High durability and reliability**
- **High accuracy and stability**
- **Sealing to IP68 10bar/IP69K**

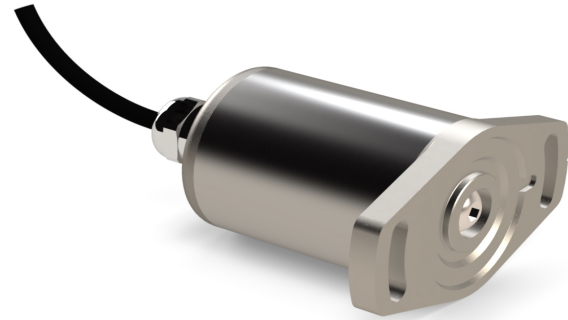

As a leading designer and manufacturer of linear, rotary, tilt and intrinsically safe position sensors, Positek® has the expertise to supply a sensor to suit a wide variety of applications. Our S613 is an affordable, durable, high-accuracy tilt sensor designed for industrial and scientific feedback applications. The S613, like all Positek® sensors, is supplied with the output calibrated to the angle required by the customer, between 15 and 160 degrees and with full EMC protection built in. The sensor provides a linear output proportional with the rotation of the sensor. There is a machined registration mark to identify the calibrated mid point. It is particularly suitable for OEMs seeking good sensor performance for arduous applications such as industrial machinery where cost is important. Overall performance, repeatability and stability are outstanding over a wide temperature range. The sensor has a rugged stainless steel body and mounting flange, the flange has two slots to simplify mounting and position adjustment. The S613 offers a range of electrical options. Environmental sealing is to IP68 10bar/IP69K.

SPECIFICATION

| | |
|--|--|
| Dimensions | |
| Body Diameter | 35 mm |
| Flange Diameter | 60 mm |
| Body Length (to seal face) | 44 mm standard, 50 mm buffered |
| <i>For full mechanical details see drawing S613-11</i> | |
| Independent Linearity/Hysteresis (combined error) | < ± 0.25° - up to 100° |
| Temperature coefficients | < ± 0.01%/°C Gain & < ± 0.01%FS/°C Offset |
| Response Time | 250 mS @ 20°C typ. |
| Resolution | Infinite |
| Damping Ratio | 0.2 : 1 (0.6 nom. @ 25°C) |
| Noise | < 0.02% FSO |
| Environmental Temperature Limits | |
| Operating | -20°C to +85°C all output options |
| Storage | -40°C to +125°C |
| Sealing | Sealing to IP68 10bar/IP69K |
| EMC Performance | EN 61000-6-2, EN 61000-6-3 |
| Vibration | IEC 68-2-6: 10 g |
| Shock | IEC 68-2-29: 40 g |
| MTBF | 350,000 hrs 40°C Gf |
| Drawing List | |
| S613-11 | Sensor Outline |
| <i>3D models, step or .igs format, available on request.</i> | |

Do you need a position sensor made to order to suit a particular installation requirement or specification? We'll be happy to modify any of our designs to suit your needs - please contact us with your requirements.

For further information please contact:

www.positek.com sales@positek.com

Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.



S613 SUBMERSIBLE LARGE ANGLE TILT SENSOR



High-resolution tilt feedback for submerged and outdoor / offshore applications

How Positek's technology eliminates wear for longer life

Positek's Inductive technology is a major advance in displacement sensor design. Our displacement transducers have the simplicity of a potentiometer with the life of an LVDT/RVDT. Our technology combines the best in fundamental inductive principles with advanced micro-electronic integrated circuit technology. A Positek sensor, based on simple inductive coils using Positek's ASIC control technology, directly measures absolute position giving a DC analogue output signal. Because there is no contact between moving electrical components, reliability is high and wear is eliminated for an exceptionally long life. It also overcomes the drawbacks of LVDT technology – bulky coils, poor length-to-stroke ratio and the need for special magnetic materials, no requirement for separate signal conditioning. We also offer a range of ATEX-qualified intrinsically-safe sensors.

| | | | | |
|------|--------------|--------|-----|--------|
| S613 | a | b | c | d |
| | Displacement | Output | L50 | Z-code |

| a Displacement | | | Value |
|--|---------------------------------------|--------------------------------------|------------|
| Factory set to any angle from 0-15° (±7.5°) to 0-160° (±80°) (e.g. 0-54°) | | | 54 |
| b Output | Supply V _{dc} (tolerance) | Output | Code |
| +5V (4.5 - 5.5V) | | 0.5 - 4.5V (ratiometric with supply) | A |
| ±15V nom. (±9 - 28V) | | ±5V | B |
| +24V nom. (13 - 28V) | | 0.5 - 9.5V | C |
| ±15V nom. (±13.5 - 28V) | | ±10V | D |
| +24V nom. (18 - 28V) | | 4 - 20mA 2 wire | E |
| +24V nom. (13 - 28V) | | 4 - 20mA 3 wire Sink | F |
| +24V nom. (9 - 28V) | | 0.5 - 4.5V | G |
| +24V nom. (13 - 28V) | | 4 - 20mA 3 wire Source | H |
| Supply Current: 'A' 10mA nominal, 12mA max. 'B', 'D' & 'G' 12mA nominal, 15mA max. 'E' 26mA max. 'F' & 'H' 32mA nominal, 35mA max. | | | |
| c Connections | | | Code |
| Cable gland IP68 10bar/IP69K Pg7 | | | Lxx |
| Specify required cable length 'xx' in cm. e.g. L2000 specifies cable gland with 20 m of cable, 50 cm supplied as standard. | | | |
| d Z-code (optional) | | | Code |



For further information please contact:

www.positek.com sales@positek.com


Tel: +44(0)1242 820027 fax: +44(0)1242 820615

Positek, Andoversford Industrial Estate, Cheltenham GL54 4LB. U.K.


Installation Information

S613 SUBMERSIBLE LARGE ANGLE TILT SENSOR


| Output Option | Output Description: | Supply Voltage: V_s (tolerance) | Load resistance: (include leads for 4 to 20mA O/Ps) |
|---------------|--------------------------------------|--------------------------------------|--|
| A | 0.5 - 4.5V (ratiometric with supply) | +5V (4.5 - 5.5V) | $\geq 5k\Omega$ |
| B | $\pm 5V$ | $\pm 15V$ nom. ($\pm 9 - 28V$) | $\geq 5k\Omega$ |
| C | 0.5 - 9.5V | +24V nom. (13 - 28V) | $\geq 5k\Omega$ |
| D | $\pm 10V$ | $\pm 15V$ nom. ($\pm 13.5 - 28V$) | $\geq 5k\Omega$ |
| E | 4 - 20mA 2 wire Current Loop | +24V nom. (18 - 28V) | $\approx 0 - 300\Omega$ max. @24V ~ 1.2 to 6V across 300 Ω $\{R_L \text{ max.} = (V_s - 18) / 20^{-3}\}$ |
| F | 4 - 20mA 3 wire Sink | +24V nom. (13 - 28V) | $\approx 0 - 950\Omega$ max. @24V ~ 3.8 to 19V across 950 Ω $\{R_L \text{ max.} = (V_s - 5) / 20^{-3}\}$ |
| G | 0.5 - 4.5V | +24V nom. (9 - 28V) | $\geq 5k\Omega$ |
| H | 4 - 20mA 3 wire Source | +24V nom. (13 - 28V) | $\approx 0 - 300\Omega$ max. ~ 1.2 to 6V across 300 Ω |

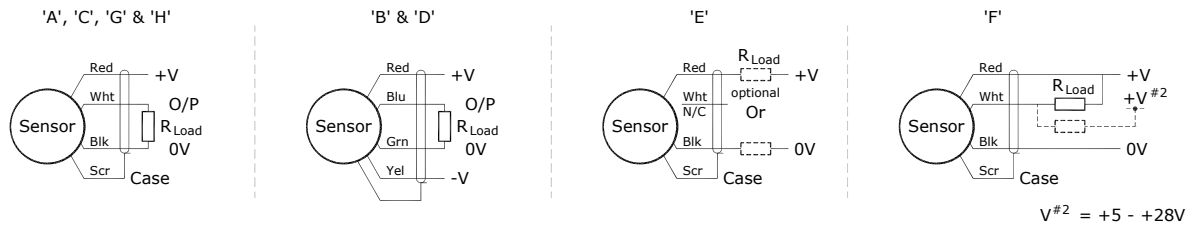

Mechanical Mounting: Flange mounted - see drawing S613-11. Note: the sensor should be mounted on a vertical face.



Output Characteristic: The sensor has full rotational freedom and two sectors, 180° apart, over which linear response can be achieved. At the mid point of the calibrated range the output signal will be half full scale deflection, the mounting flange will be vertical, mid point adjustment is achieved by rotating the sensor in the flange slots. In the calibrated range the output increases as the sensor is rotated in an anti-clockwise direction viewed from the flange face- see sketch above. The calibrated output is factory set to be between 15° and 160°.

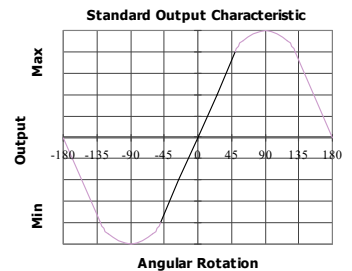

Incorrect Connection Protection levels:-

- A **Not protected** – the sensor is **not** protected against either reverse polarity or over-voltage. The risk of damage should be minimal where the supply current is limited to less than 50mA.
- B & D Supply leads diode protected. Output must not be taken outside $\pm 12V$.
- C & G Supply leads diode protected. Output must not be taken outside 0 to 12V.
- E, F & H Protected against any misconnection within the rated voltage.